WindStorm™ MODELS **5745** & **5765**

WIND LOAD-RATED GARAGE DOORS



Model 5745, 7' high, Long panel, Black finish, Stockton 2 windows

Premium insulated garage doors designed for both beauty and strength to help protect your home against the damaging effects of hurricane force winds.

- **Stringently tested** to meet Texas Department of Insurance (TDI) and Florida Building Code (FBC) requirements, and have Miami-Dade approvals for use in Florida's High Velocity Hurricane Zone (HVHZ).
- **Impact resistant**
- **Reinforced hardware throughout the door** – for a true wind load-rated system.
- **Strength, durability and thermal efficiency** – with three-layer construction providing a continuous layer of foamed-in-place CFC free polyurethane insulation between two layers of corrosion-resistant steel.
- **In-between section thermal seals** – snug-fitting tongue-and-groove section joints reduces wind and weather from entering the garage.
- **Heavy gauge steel end caps** for better appearance, improved strength and to protect the insulation from damage.
- **Bulb-type bottom weatherseal** guards against wind and rain while providing a cushion when closing.
- **Artisan Wood Grain™ Finishes** provide the look of real wood on an insulated steel door.


The Genuine. The Original.

OVERHEAD DOOR®

Select Your Panel Style and Color


1 Choose a Panel Style and Model

Standard Panel (SP)




Models 5745, 5765

Vertical Short (VS)




Models 5745, 5765

Vertical Long (VL)



Models 5745

Long Panel (LP)



Models 5745, 5765

Flush Panel (FP)



Models 5745, 5765

MODELS	THICKNESS	POLYURETHANE INSULATION	U-FACTOR[1]	R-VALUE[2]	STEEL BACKING*	WARRANTY
5745	1 3/8"	•	0.21	12.12	•	Limited Lifetime
5765	1 7/8"	•	0.18	16.22	•	Limited Lifetime

1 - U-Factors are based on independent testing and verified per ANSI/DASMA 105. For products other than aluminum full-view doors, testing was conducted on specific sizes of solid doors. Actual thermal performance may vary by door size and configuration.

2 - Overhead Door Corporation uses a calculated door section R-value for our insulated doors.

* Backing: Steel – Interior-side steel backing for strength and finished appearance.

DASMA Door & Access Systems Manufacturers Association International
THERMAL PERFORMANCE VERIFICATION PROGRAM
www.dasma.com/thermal

Overhead Door™ Brand participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.

Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

2 Choose a Color

Painted Finishes
Embossed wood grain



White



Almond



Sandstone



Terra Bronze



Brown



Black
(Model 5745 only)

Artisan Wood Grain™ Plank Finishes
Stucco embossment
(Model 5745, Flush panel only)



Cedar Plank



Medium Oak Plank



Beachwood Plank



Carbon Oak Plank



Black Plank



White Plank

Artisan Wood Grain™ Bi-directional Finishes
Stucco embossment
(Not available on Flush panel)



Western Cedar



Carbon Oak



Medium Oak

Panel designs and colors shown are representational only. Panel designs may vary based on selected configuration and actual colors may vary due to fluctuations in the printing projects. Always request a color sample from your Distributor for accurate color matching.

Customize Your Door With Windows

3 Choose a Window Style

Available on Artisan Wood Grain™ Plank Finishes and Paint Finishes


Arched Stockton Long


Cascade Long


Cascade Short


Clear Long


Clear Short


Double Narrow


Narrow


Prairie Long


Prairie Short


Sherwood Long


Sherwood Short


Stockbridge Long (3-Lite)


Stockbridge Long (4-Lite)


Stockton Long (4-Lite)


Stockton Long (6-Lite)


Stockton Long (8-Lite)


Stockton Long (8-Lite Arched)


Stockton Long (12-Lite)


Stockton Short


Williamsburg Long


Williamsburg Short


Wyndbridge Long


Arched Stockton Long 4 pc


Williamsburg Long 4 pc

Choice of single or double arch is available for arched top double car windows

Available on Artisan Wood Grain™ Bi-Directional Finishes


Clear Long


Clear Short


Prairie Long


Prairie Short


Stockbridge Long (3-Lite)


Stockbridge Long (4-Lite)


Stockton Long (4-Lite)


Stockton Long (6-Lite)


Stockton Long (8-Lite)


Stockton Short

Model 5745 (Impact glazing available)
For Vertical Short panels with windows a full row of windows are required.
For Standard, Vertical Short, Vertical Long panels with windows a full row of impact windows are required.

Model 5765 (Impact glazing **not** available)
For Vertical Short panels with windows a full row of windows are required.

WindStorm™ MODELS 5745 & 5765

Window Availability By Door Panel Style

STANDARD PANEL
Cascade Short
Clear Short
Prairie Short
Sherwood Short
Stockton Short
Waterton Short
Williamsburg Short
(4 pc & 8 pc)

VERTICAL SHORT PANEL
*Arched Stockton Long
Ashton Long
Cascade Short & Long
Clear Short & Long
Prairie Short & Long
Ruston Long
Sherwood Short & Long
Stockbridge Long (3-Lite)
Stockbridge Long (4-Lite)
Stockford Long
Stockton Long (4, 6, 8 & 12-Lite)
Stockton Long Arch 8-Lite
Stockton Short (4-Lite)
Williamsburg Long (2 pc & 4 pc)
Wyndbridge Long
(2 pc, 3 pc, 4 pc, 5 pc)

LONG & VERTICAL LONG PANEL
*Arched Stockton Long
Ashton Long
Cascade Long
Clear Long
Prairie Long
Ruston Long
Sherwood Long
Stockbridge Long (3-Lite)
Stockbridge Long (4-Lite)
Stockford Long
Stockton Long (4, 6, 8 & 12-Lite)
Stockton Long Arch 8-Lite
Williamsburg Long (2 pc & 4 pc)
Wyndbridge Long
(2 pc, 3 pc, 4 pc, 5 pc)


FLUSH PANEL
*Arched Stockton Long
Cascade Short & Long
Clear Short & Long
**Double Narrow
**Narrow
Prairie Short & Long
Sherwood Short & Long
Stockbridge Long (3-Lite)
Stockbridge Long (4-Lite)
Stockford Long
Stockton Long (4, 6, 8 & 12-Lite)
Stockton Long Arch 8-Lite
Stockton Short (4-Lite)
*Williamsburg Long (2 pc & 4 pc)
*Williamsburg Short (4 pc & 8 pc)
Wyndbridge Long (2 pc, 3 pc, 4 pc)

* Available in single and double arch.

** Artisan Wood Grain™ Plank Finishes with 1/2" clear insulated or impact resistant glass.


Optional Window Placement

Vertical Window Option
(Left or right)

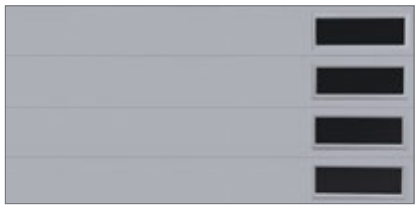

Flush panel, Clear Long Windows

All Window Option
(Flush panel only)

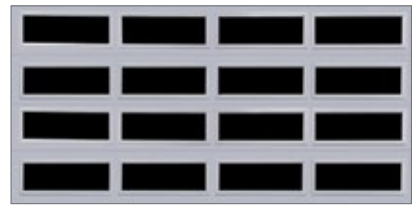

Flush panel, Clear Long windows

Vertical or Horizontal Option
(Left or right)



Flush panel, Double Narrow windows

Windows may be arranged vertically or horizontally on the Models 5745 and 5765. Windows must be Clear Short, Clear Long or Narrow. Windows placed in the bottom section of a door must have DSB 1/8", tempered, or 1/2" insulated glass.

Building Code/Agency Requirements

EXPOSURE B	DOOR WIDTH UP TO	WIND SPEEDS/DESIGN PRESSURES MPH[1]/MPH[2]/PSF DESIGN PRESSURE	IMPACT RESISTANT	GLASS AVAILABLE STANDARD	GLASS AVAILABLE IMPACT
Model 5745	9′	90 - 200 mph[1] / 115 - 255 mph[2] (+12.80/-14.80) - (+64.00/-72.00)	Yes[3]	SP/LP[3]	SP/LP[3]
	16′	90 - 170 mph[1] / 115 - 220 mph[2] (+12.40/-13.80) - (+46.00/-52.00)	Yes[3]	SP/LP[3]	SP/LP[3]
	18′	90 - 170 mph1 / 115 - 225 mph[2] (+12.40/-13.80) - (+46.00/-52.00)	Yes[3]	SP/LP[3]	SP/LP[3]
Model 5765	9′	90 - 200 mph[1] / 115 - 255 mph[2] (+12.80/-14.80) - (+64.00/-72.00)	Yes[3]	SP/LP[3]	No
	16′	90 - 170 mph[1] / 115 - 220 mph[2] (+12.40/-13.80) - (+46.00/-52.00)	Yes[3]	SP/LP[3]	No
	18′	90 - 170 mph[1] / 115 - 225 mph[2] (+12.40/-13.80) - (+46.00/-52.00)	Yes[3]	SP/LP[3]	No

[1] Above wind speeds based on ASCE 7-05 are applicable for enclosed structures with an importance factor of 1.0, mean roof height of 30', and assume a maximum of 2' of the door is located within the end zone of a structure. The above wind speeds listed as a guide only. Wind speed is only one of many factors that determine the design pressure on a structure. The design and location of the structure can have a great effect on the loads placed on the garage door. Consult a registered architect or structural engineer to determine what design pressure is appropriate for your application.

[2] Above wind speeds based on ASCE 7-10 Category II structure with a mean roof height of 30' and a maximum of 2' of the door is located within the end zone of a structure. The above wind speeds listed as a guide only. Wind speed is only one of many factors that determine the design pressure on a structure. The design and location of the structure can have a great effect on the loads placed on the garage door. Consult a registered architect or structural engineer to determine what design pressure is appropriate for your application.

[3] Options available on select models.

Wind load drawings available upon request.
SP - Standard panel windows, LP - Long panel windows



Model 5745, Vertical Short panel, Almond finish, Stockton Long (8-Lite) windows, Decorative hardware



Model 5745, Long panel, White finish, Arched Stockton windows

Transform Your Home with the DoorView® Visualization Tool.

Go to **overheaddoor.com to** try our online interactive software tool that lets you visualize what your home would look like with a new Overhead Door™ garage door. Contact your local Overhead Door™ Distributor for more information and to receive a quote.



BEFORE

AFTER

Model 5745 7' high, Flush panel, Medium Oak Plank finish, Clear Long windows

The Genuine. The Original.

Since 1921, Overhead Door™ Brand has not only raised the standards of excellence for the industry – we've created them. We created the first sectional garage door in 1921 and the first electric garage door opener in 1926.

Today, our network of over 400 Overhead Door™ Distributors are still leading the way with innovative solutions and unmatched installation, service and support. So look for the Red Ribbon. It's your guarantee that you're getting the genuine, the original Overhead Door™ products and services.

SOLD AND DISTRIBUTED BY:

The Genuine. The Original.

2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067
1-800-929-DOOR • sales@overheaddoor.com
overheaddoor.com

©2026 Overhead Door Corporation. Overhead Door is a trademark and Thermacore and the Red Ribbon Logo are registered trademarks of Overhead Door Corporation. All other trademarks are the property of their rightful owners. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. R900-1016 10/26