627 STORMTITE™ AP

ADVANCED PERFORMANCE INSULATED ROLLING DOOR



ADVANCED THERMAL PERFORMANCE.
CLIMATE CONTROL.
SECURITY.

The Genuine. The Original.

OVERHEAD DOOR®



Standard features at a glance

Max. standard width	30'4" (9246 mm)
Max. standard height	19'4" (5893 mm)
Curtain	24 gauge galvanized steel front 24 gauge galvanized steel back
Slat profile	Flat, insulated, type FIT-265
Insulation	Foamed-in-place, CFC and HCFC-free polyurethane
R-value[1]	10.9 (1.91 W/Msq)
STC rating	Through curtain 28; Installed system; 21
Flame spread and smoke index	Class A or 1
Finish	Gray, tan, brown or white
Hood	24 ga. galvanized steel
Wind load	20 psf
Standard mounting	Face-of-wall
Operation	Chain hoist
Standard springs	20,000 cycle
Advanced perimeter protection	Bottom weatherseal, interior and exterior EPDM triple-finned guide brush weatherseals, interior hood baffle, and lintel seal
Guides	3-angle structural steel; black powder coated
Bottom bar	Black powder coated steel with vinyl weatherseal
Lock	Padlockable chain keeper
Warranty	24-month limited on door or 3 year limited on door and operator system (when purchased together)

Options

- Air infiltration package that meets requirements of IECC code, which includes: guide cover and cap; interior and exterior triple-finned brush guide seal, lintel seal, bottom astragal
- Between-jamb mounting
- Electric (RHX®, RSX®, RMZ™) or crank operation
- Bottom sensing edge
- Sloping bottom bar
- Stainless steel (22 gauge front/24 gauge back) or aluminum slats
- PowderGuard® Zinc or Textured finishes available on curtain, steel bottom bar angles and guides
- PowderGuard® Premium powder coat paint finish in approximately 200 standard colors, or color-matched to specification
- Insulated vision lites uniformly spaced at 1" x 10" (25.4 mm x 254 mm)
- High cycle counter balance with high usage package
- Wind load option available
- Cylinder lock
- Special application doors:
  - Oversized doors
  - Combination doors (2 doors on a single head plate)

[1] R-value is a measure of thermal efficiency. The higher the R-value the greater the insulating properties of the door. Overhead Door Corporation uses a calculated door section R-value for our insulated doors.

Cover image: *Model 627, Brown finish, insulated vision lites*
Image above: *Model 627, Tan finish*

Advanced performance in an insulated rolling door system


The Stormtite™ AP Model 627 is the best-in-class insulated, heavy-duty rolling service door. It is engineered to supply advanced performance in industrial and general commercial applications where thermal performance, climate control and security are primary concerns.

The uniquely designed flat slat profile measures 1.4" thick, and is constructed with a CFC-free, foamed-in-place polyurethane insulation (R-value 10.9). Advanced perimeter protection features are standard.

When compared to the International Energy Conservation Code (IECC) 2012 and 2015 requirements, the Stormtite™ AP Model 627 far surpasses these. The superior construction of this rolling service door and the advanced design of the perimeter seals offer superior door protection against air leakage.


Slat data

FIT-265 Slat



This uniquely designed rolling door slat measuring 1.4" in thickness, provides advanced thermal performance and increased durability.

Brush seal




This innovative triple-finned EPDM brush seal protects the interior and exterior perimeter of the door system against the elements.

Finish options

	Finish details
Standard polyester base coat	Two-coat system with polyester based top coat.
PowderGuard® Premium powder coat	Weather resistant polyester powder coat available in 197 colors; custom color match.
PowderGuard® Textured finish	Industrial textured powder coat provides a thicker, more scratch resistant coat for added product protection.
PowderGuard® Zinc finish	Zinc enriched powder coat provides excellent corrosion protection that outperforms both hot dipped and cold galvanized steel. Color selection from 197 powder coat colors; custom color match also available.

Colors


Gray


Tan



Brown


White

Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Overhead Door™ Distributor for accurate color matching.



Model 627, Gray finish. Installed at a manufacturing plant in Lewistown, Pennsylvania.

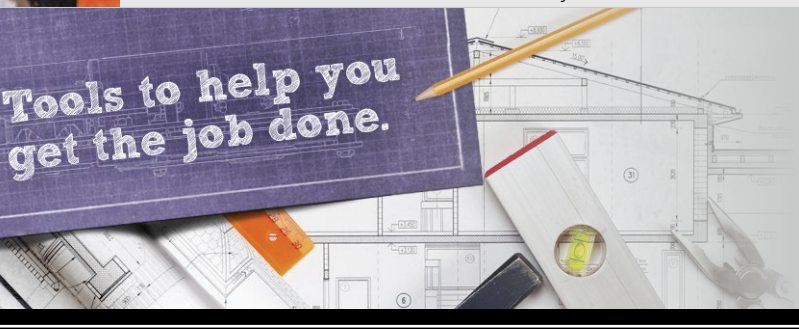

Architect's Edge

24/7 Self-service options at overheaddoor.com

- Custom Automated Drawing Generator
- Specs
- CAD Drawings
- BIM Object Library
- Continuing Education
- Architectural Services Contact

The original, innovative choice for unequalled quality and service.

Overhead Door Corporation pioneered the sectional garage door industry, inventing the first sectional garage door in 1921 and the first electric door operator in 1926. Today, we continue to be the industry leader through the strength of our product innovation, superior craftsmanship and outstanding customer support, underscoring a legacy of quality, expertise and integrity. That's why design and construction professionals specify Overhead Door™ products more often than any other brand. Our family of over 400 Overhead Door™ Distributors across the U.S. and Canada not only share our name and logo, but also our commitment to excellence.

OVERHEAD DOOR®

**INDUSTRY EXPERTS,
DELIVERING TOTAL SOLUTIONS**

2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067
1-800-929-DOOR • sales@overheaddoor.com
overheaddoor.com

©2026 Overhead Door Corporation. Overhead Door and Stormtite are trademarks and the Red Ribbon logo is a registered trademark of Overhead Door Corporation. All other trademarks are property of their rightful owners. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. C900-982 10/26