593/594

THERMACORE® DOOR SYSTEMS

MEDIUM DUTY INSULATED STEEL SECTIONAL DOORS



THERMAL EFFICIENCY.
BROAD RANGE OF APPLICATIONS.
LONG-LASTING PERFORMANCE.

The Genuine. The Original.

OVERHEAD DOOR®

Standard Features at a Glance

Thermal Efficiency

U-factor[1]	0.22
R-value[2]	12.76 (2.26 K m²/W)
Thermal Break	Hot melt
IECC® Compliant	Model 593 and 594 meet IECC® requirements for maximum U-factor of operable fenestrations with a 3rd party certified tested value of less than 0.37

Construction

Panel Thickness	1 3/8" (35 mm)
Max Height	16'1" (4,902 mm)
Max Width	20'2" (6,147 mm)
Exterior Steel	Model 593: .015" (.38 mm) galv. Model 594: .012" (.30 mm) galv.
Exterior Surface	Model 593: Ribbed, textured Model 594: Raised panel, textured
Standard Springs	10,000 cycle

Color options

Interior Colors	White
Exterior Colors	593: White, Gray, Tan, Industrial Brown; Optional Trinar colors: White, Brown, Beige 594: White, Brown, Almond, Sandstone, Terra Bronze; Optional Trinar colors: White, Brown and Beige

Limited Warranty 10-year delamination
1-year door
3-year/20,000 cycle door and operator system (material and workmanship)

Options

- Thermal glazing
- Aluminum sash section available
- High-usage components
- Electric operator
- Chain hoist
- Posi-Tension™ drums
- Safety bottom fixtures
- Bottom-sensing edge
- Flexible jamb, header seal
- Exhaust ports
- Wind load options √FBC APPROVED √TDI APPROVED

DASMA Door & Access Systems Manufacturers Association International
THERMAL PERFORMANCE VERIFICATION PROGRAM
www.dasma.com/thermal

Overhead Door™ Brand participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional doors. The lower the U-factor rating, the better the thermal performance.

Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

[1] U-Factors are based on independent testing and verified per ANSI/DASMA 105. For products other than aluminum full-view doors, testing was conducted on specific sizes of solid doors. Actual thermal performance may vary by door size and configuration.

[2] R-value is a measure of thermal efficiency. The higher the R-value the greater the insulating properties of the door. Overhead Door Corporation uses a calculated door section R-value for our insulated doors.


Cover image: *Model 594; Installation and Service: Overhead Door Company of Glen Falls*

Strong, Lightweight, Attractive and Durable


Models 593 and 594 are designated for applications when your project requires a thermal door that is as energy efficient as it is attractive. Both models are fabricated using Overhead Door's proprietary, computer-controlled manufacturing process. The result is an exceptionally well-built door that adheres to the strictest product tolerances and quality standards – for long-lasting performance and good looks.


Panel Options


Model 593 only
Ribbed, Textured Panel



Model 594 only
Raised, Textured Panel



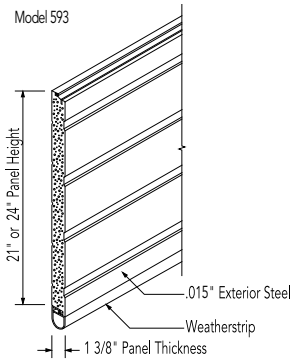



Color Options


Model 593


White


Tan


Gray



Industrial Brown


Trinar White


Trinar Beige


Trinar Brown

Model 594


White


Almond


Sandstone


Brown


Terra Bronze


Trinar White


Trinar Beige


Trinar Brown

Actual door colors may vary from the brochure due to fluctuations in the printing process. Always request a color sample from your Overhead Door Distributor for accurate color matching.

Glazing Options

Model 593


Double Thermal Acrylic (25"w by 12"h)


Aluminum Sash Section with DSB glazing


Insulated DSB (24"w by 7"h)


Clear Long* (44"w by 15"h)
*Not available on door wider than 20'2"


Model 594


Insulated DSB (20.75"w by 15"h)


Aluminum Sash Section with DSB glazing



Installation and Service: Overhead Door Company of Twin Falls.

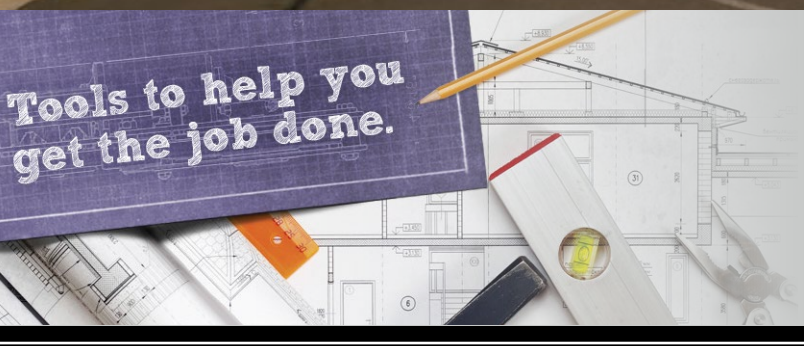

Architect's Edge

24/7 Self-service options at overheaddoor.com

- Custom Automated Drawing Generator
- Specs
- CAD Drawings
- BIM Object Library
- Continuing Education
- Architectural Services Contact

The original, innovative choice for unequalled quality and service.

Overhead Door Corporation pioneered the sectional garage door industry, inventing the first sectional garage door in 1921 and the first electric door operator in 1926. Today, we continue to be the industry leader through the strength of our product innovation, superior craftsmanship and outstanding customer support, underscoring a legacy of quality, expertise and integrity. That's why design and construction professionals specify Overhead Door™ products more often than any other brand. Our family of over 400 Overhead Door™ Distributors across the U.S. and Canada not only share our name and logo, but also our commitment to excellence.

OVERHEAD DOOR®

**INDUSTRY EXPERTS,
DELIVERING TOTAL SOLUTIONS**

2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067
1-800-929-DOOR • sales@overheaddoor.com
overheaddoor.com

©2026 Overhead Door Corporation. Overhead Door is a trademark and Thermacore and the Red Ribbon logo are registered trademarks of Overhead Door Corporation.
All other trademarks are property of their rightful owners. Consistent with our policy of continuing product improvement,
we reserve the right to change product specifications without notice or obligation. C900-095 10/26